




RVLDM350/2 Series DRIVER

- Remote Variable Intensity Control - ~10% to 100%
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

ELECTRICAL:

Input Voltage: 24 VDC -0.5 / +4V
 Input Current: 0.5 Amp Max
 Connection: Screw terminals

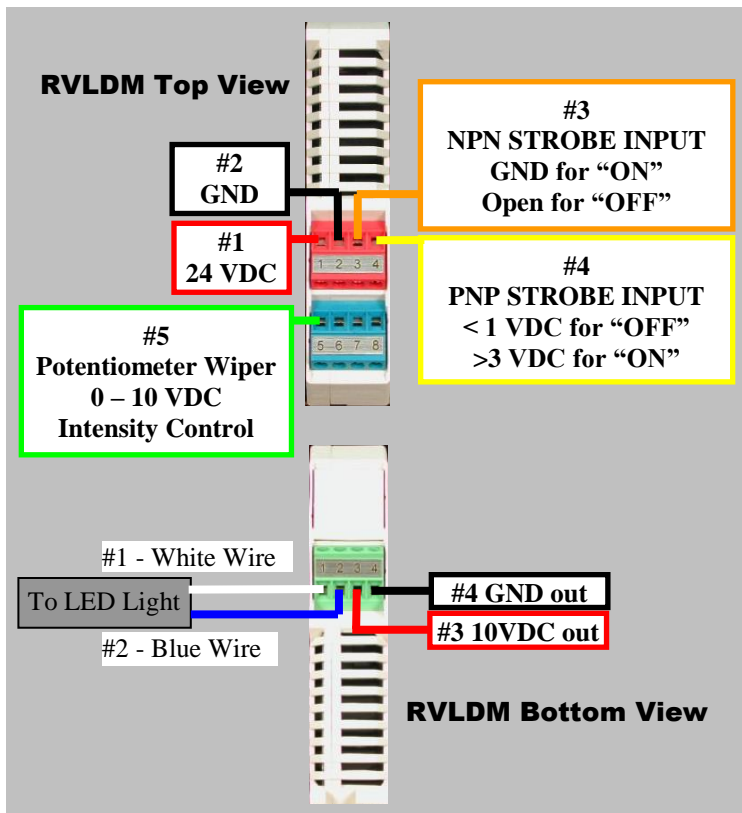

RVLDM350/2 is compatible with the following lights:

- | | |
|--------------------|--------------------|
| LL16 – 850 (IR) | MLL12 – All Colors |
| SP3.25 – 850 (IR) | MLL14 – All Colors |
| RL2.5 – All Colors | MBL22 – All Colors |
| DA2 – All Colors | |

NOTE:

Jumper 24VDC to PNP Strobe Input or GND to NPN Strobe input for light to remain in constant “ON” state.

Strobe is Pulse Width Duration – Light will remain “on” for duration of signal or pulse.

Note: Brown, Black and Green wires are not used on RVLDM350/2 Driver

Warning!!!

**USE ONLY SPECTRUM ILLUMINATION LDM DRIVER WITH MONSTER LIGHTS.
DO NOT CONNECT MONSTER LIGHTS DIRECTLY TO 24VDC!**

Wiring Block Diagram

