

FEATURES:


- Remote Variable Intensity Control - ~10% to 100%
- Compact Size
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

ELECTRICAL:

- Input Voltage: 24 VDC -0.5 / +4V
- Input Current: 4.5 Amps max
- Connection: Screw terminals

ENVIRONMENTAL:

- Operating Temperature: 0 to 50°C
- Relative Humidity: 5 to 85% non-condensing

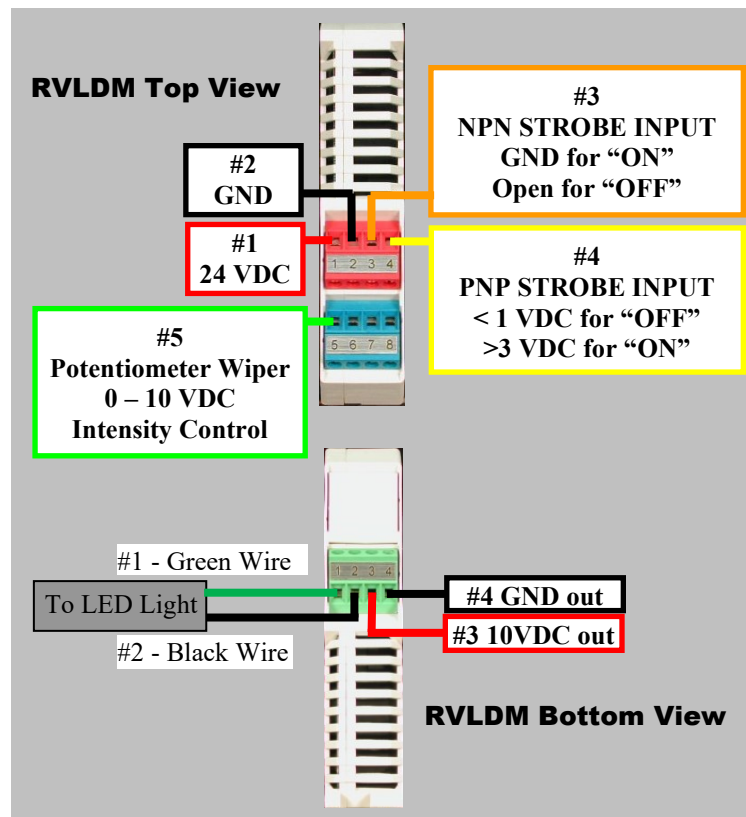

RVLDM4200 is compatible with the following lights:

- MLL169 – All Colors
- HLL134.5 – All Colors/4.2A
- DL18.25 – All Colors/4.2A
- RL19.5 – All Colors/4.2A

NOTE:

Jumper 24VDC to PNP Strobe Input or GND to NPN Strobe input for light to remain in constant "ON" state.

Strobe is Pulse Width Duration – Light will remain "on" for duration of signal or pulse.

Note: White, Blue, Orange and Red wires (M23 Powerfast Cable) or White, Blue and Brown wires (7/8" minifast cable) are not used with RVLDM4200 Driver

Warning!!!

USE ONLY SPECTRUM ILLUMINATION LDM DRIVER WITH MONSTER LIGHTS. DO NOT CONNECT MONSTER LIGHTS DIRECTLY TO 24VDC!

Wiring Block Diagram

