



ALDM350/2 Series DRIVER

Replaces ALDM350 series driver

- 0-10VDC Analog Control for intensity ~10% to 100%
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

ELECTRICAL:

Input Voltage: 24 VDC -0.5 / +4V
 Input Current: 0.5 Amp
 Connection: Screw terminals



ALDM350/2 is compatible with the following lights:

- LL16 – 850 (IR)
- SP3.25 – 850 (IR)
- RL2.5 – All Colors
- DA2 – All Colors
- MLL12 – All Colors
- MLL14 – All Colors


NOTE:

Jumper 24VDC to PNP Strobe Input or GND to NPN Strobe input for light to remain in constant “ON” state.

Strobe is Pulse Width Duration – Light will remain “on” for duration of signal or pulse.

Note: 24V power supply return and GND reference for 0-10V input must be connected to pin #2 (GND) of red connector.


Note: Brown, Black and Green wires are not used on ALDM350/2 Driver

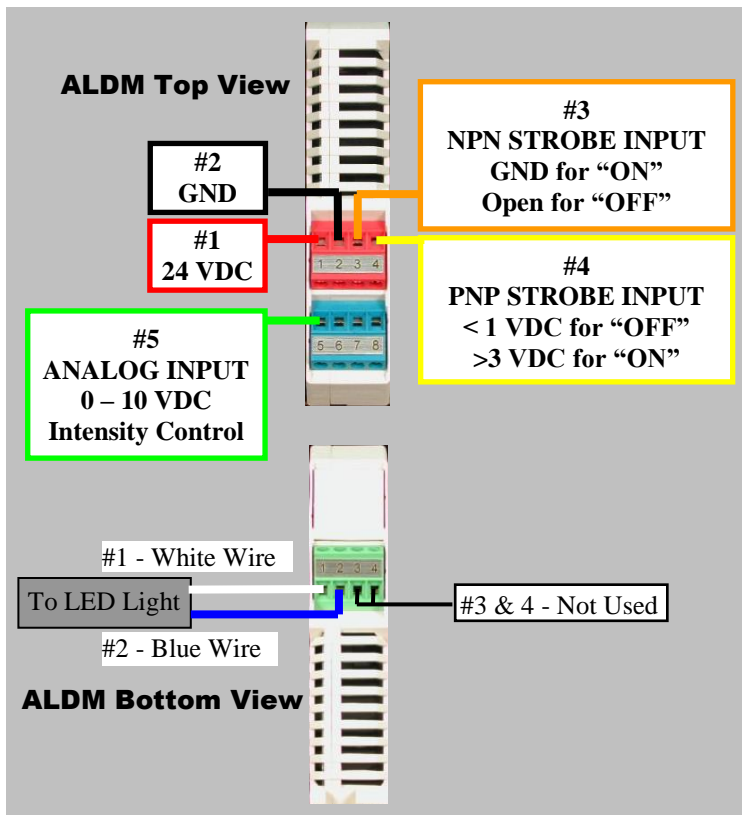


Warning!!!

**USE ONLY SPECTRUM ILLUMINATION LDM DRIVER WITH MONSTER LIGHTS.
 DO NOT CONNECT MONSTER LIGHTS DIRECTLY TO 24VDC!**

Analog Voltage vs. Light Drive Current

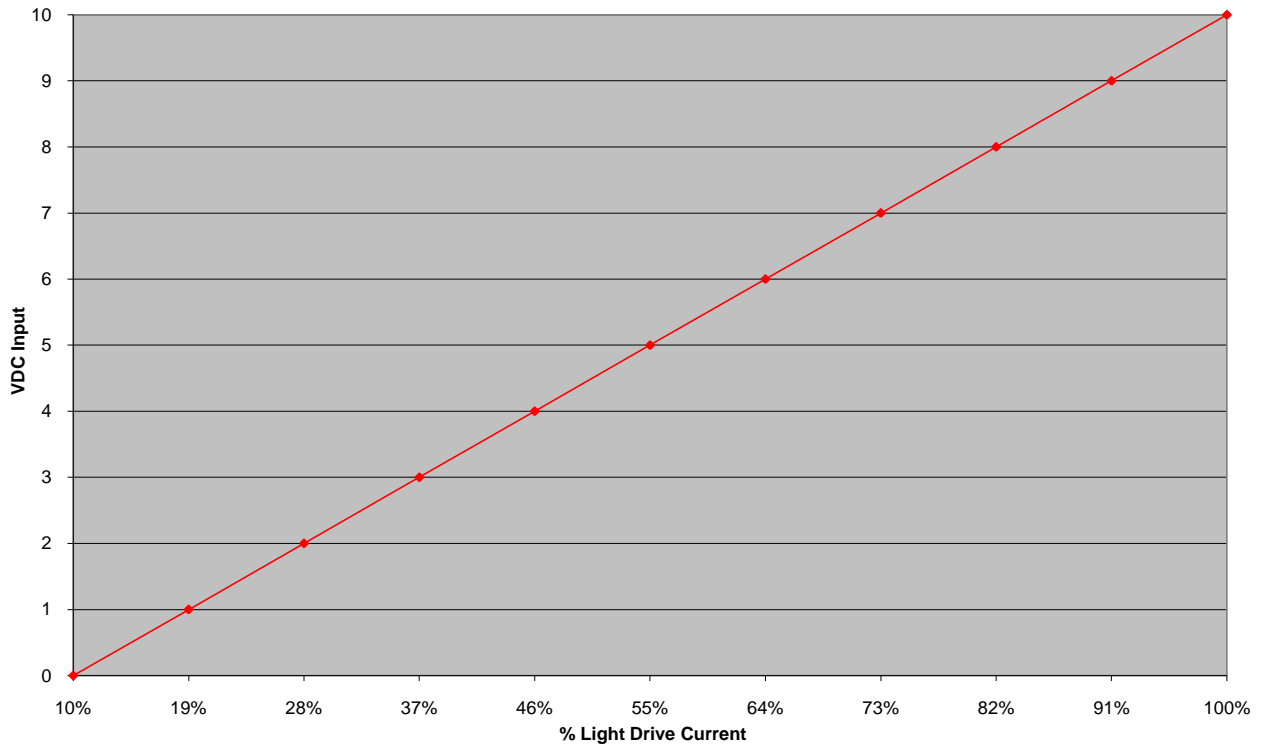

Wiring Block Diagram

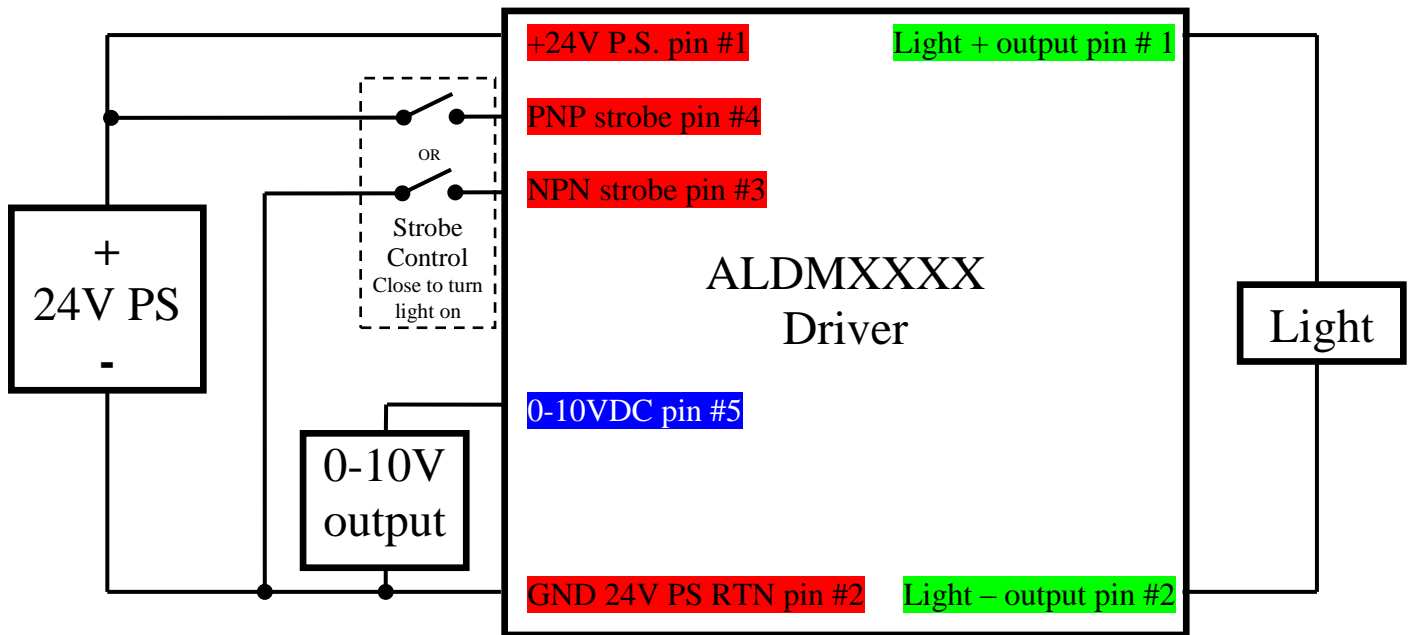

Spectrum Illumination • 5114 Industrial Park Rd. • Montague, MI 49437

Phone 231-894-4590 Fax 231-894-4582

www.spectrumillumination.com

Rev. Date: 2009-05-21